


Fig. 2



COPY TO FILE

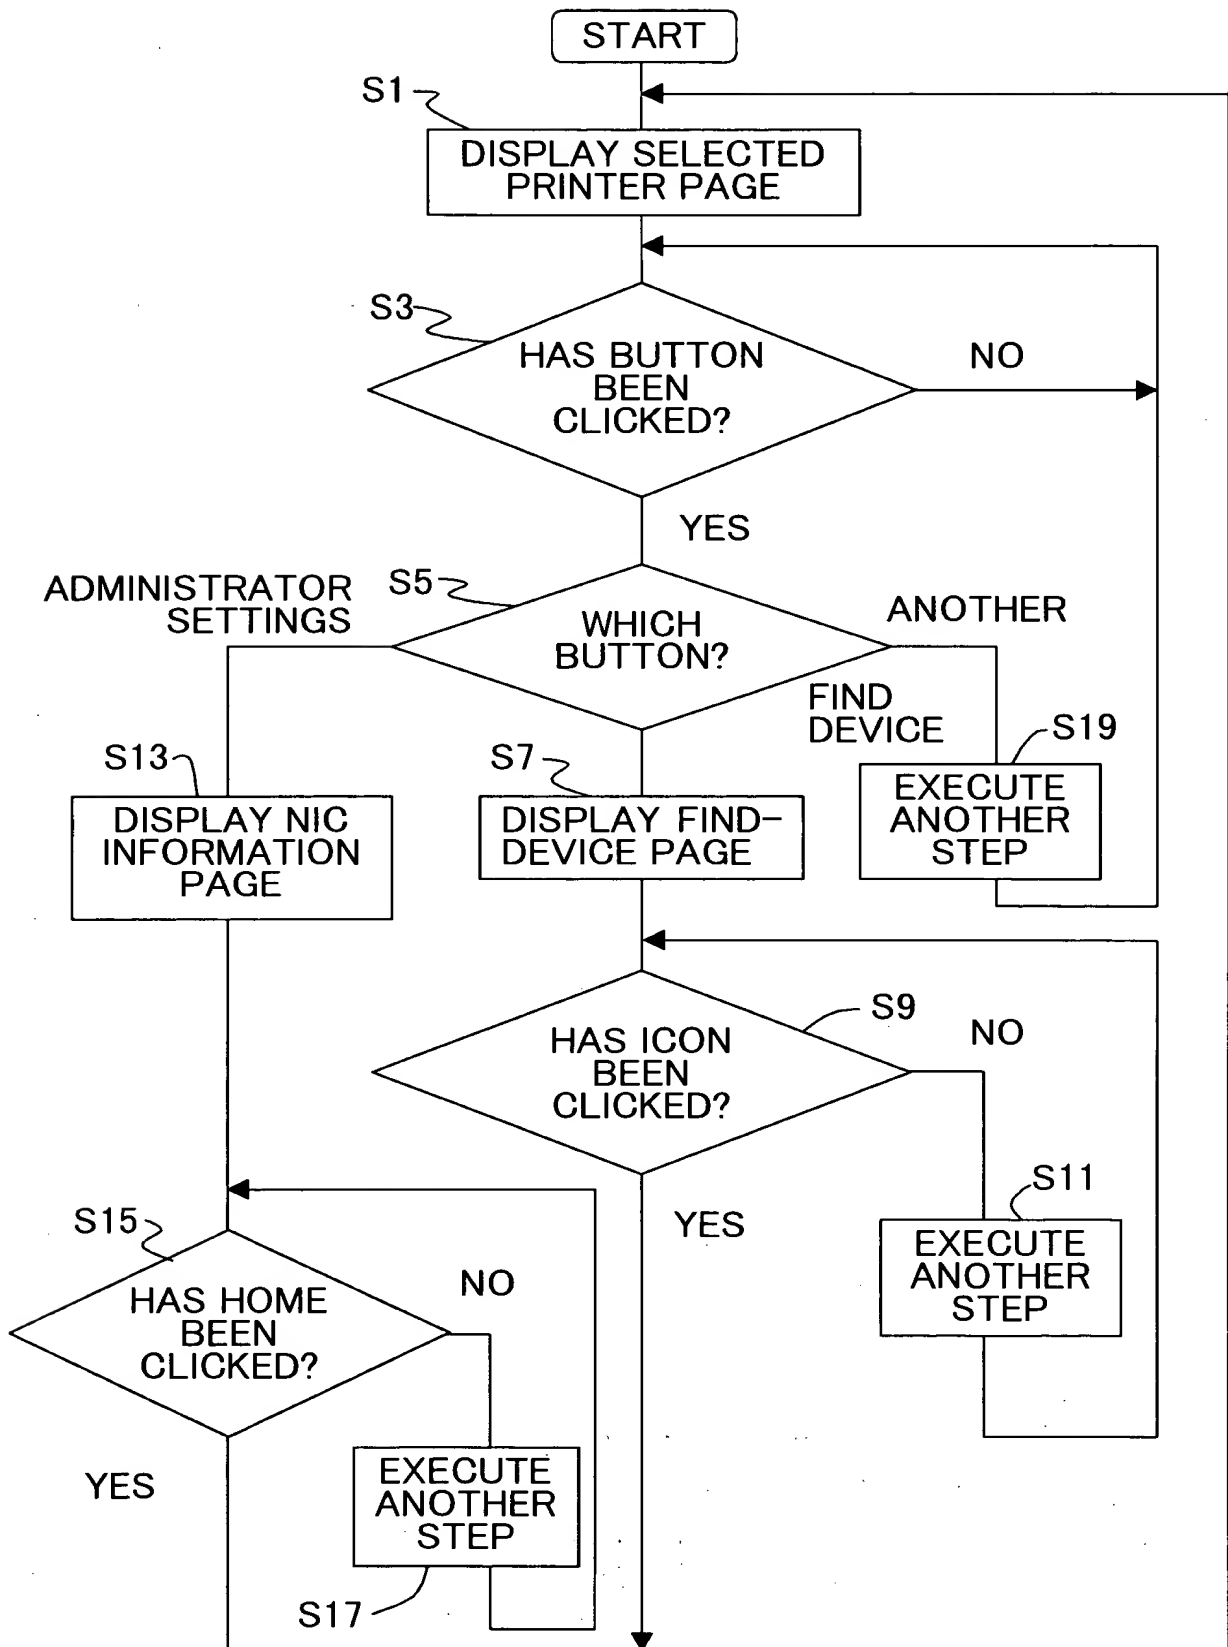

**Fig. 4**

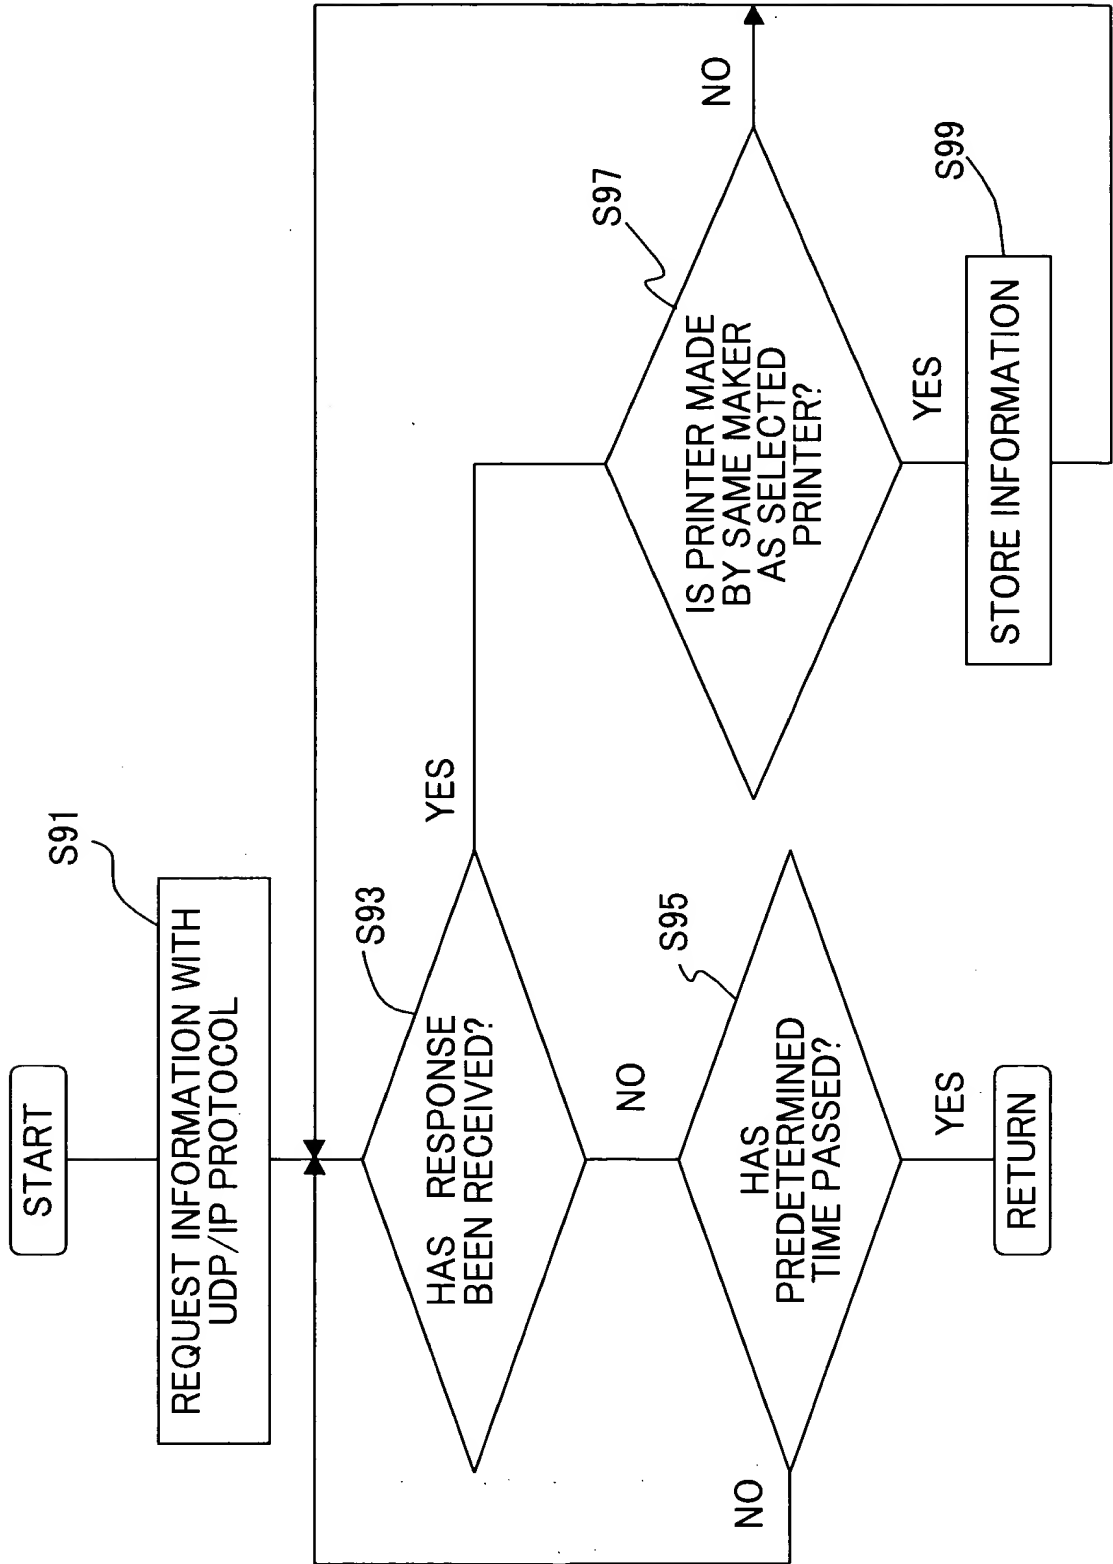


Fig. 5

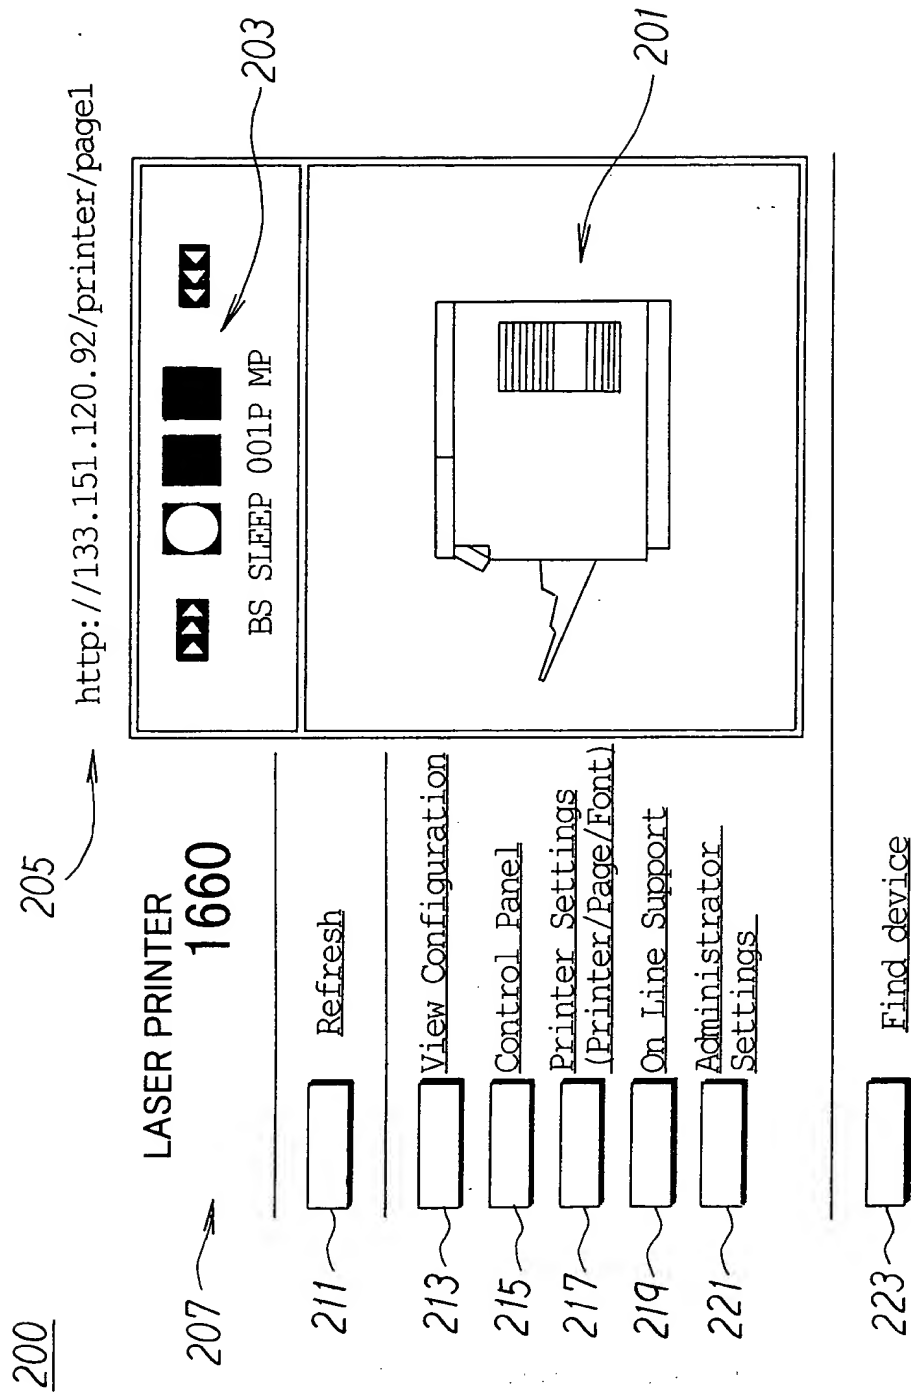






Fig. 6

300 LASER PRINTER 1660 Find device 307 <http://133.151.92/printer/find.html> 305


Device Name		IP Address
	LJ SLEEP 001P MP	Laser Printer HL-1660e
	(Printer Firmware Version: 1.04, Network Board Firmware Version: 3.42P (INTERIM) )	133.151.33.81
	LJ READY 001P T1	Laser Printer HL-1660e
	(Printer Firmware Version: 1.04, Network Board Firmware Version: 3.42P (INTERIM) )	133.151.120.70
	13 JAM REAR	Color Laser Printer HL-2400C
	(Printer Firmware Version: 0.37, Network Board Firmware Version: 3.42P (INTERIM) )	133.151.33.67
	DON'T ACCESS ME !	Laser Printer HL-1600e
	(Printer Firmware Version: 1.04, Network Board Firmware Version: 3.42P (INTERIM) )	133.151.33.90

301 [Home Page] [View Configuration] [Control Panel] 303  
 [Printer Settings] [On Line Support] [Administrator Settings] 310

Copyright © 2000

APPROVED	O.G. FIG.	
BY	CLASS	SUBCLASS
DRAFTSMAN		

Fig. 7

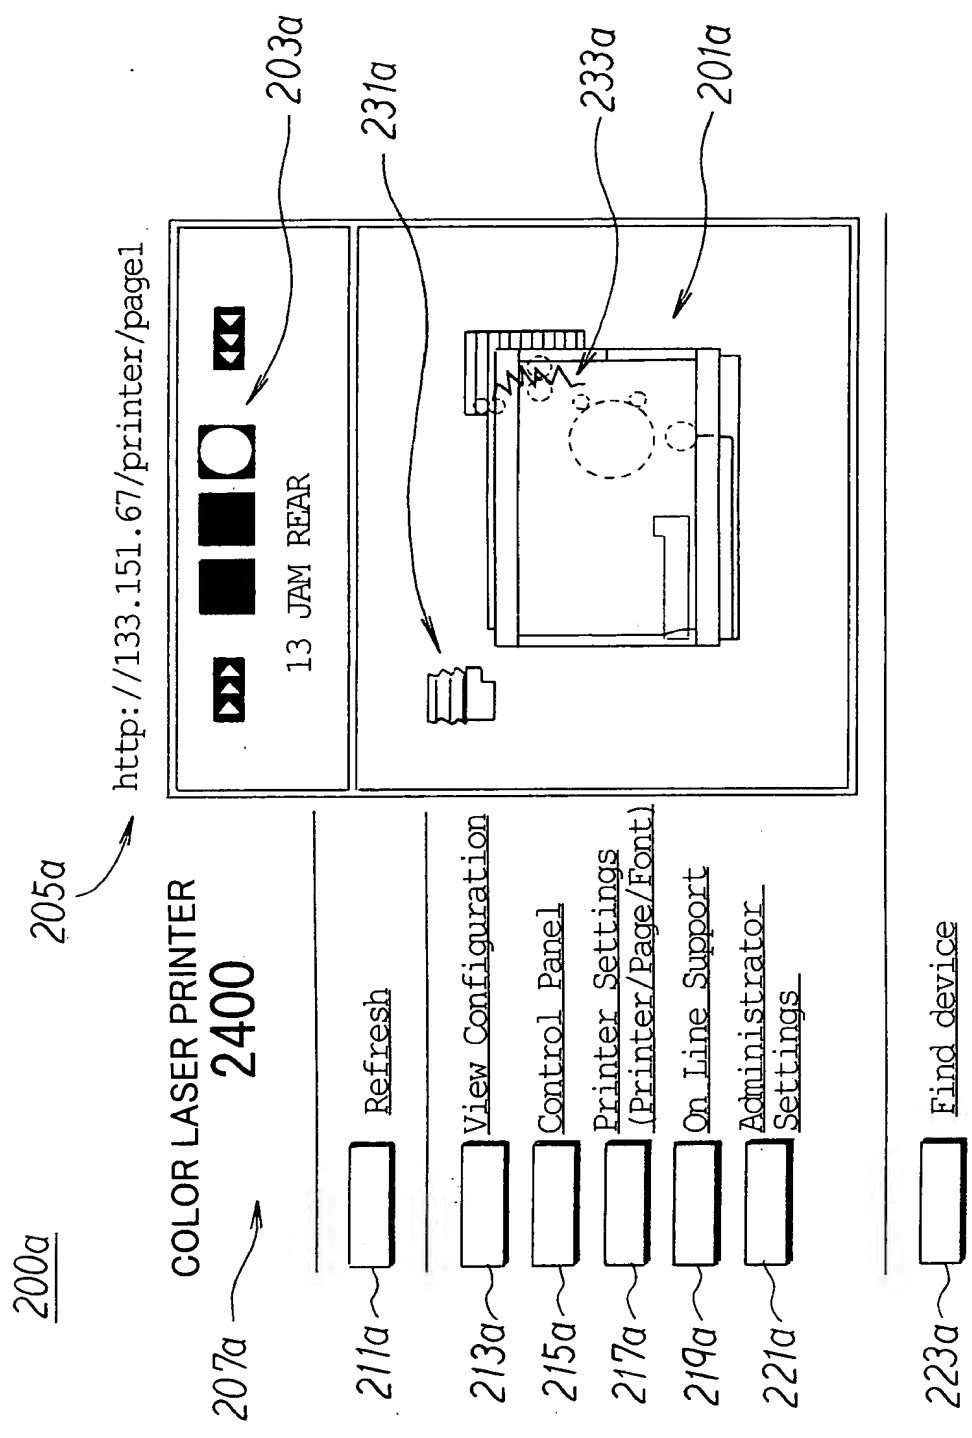

**Fig. 8**

400      405

Serial No.: 111646  
 Ethernet Address 00-40-17-01-B4-1E

Firmware: V3.42 (INTERIM) 97.12.10  
 Boot: V4.3

<http://133.151.120.92/nic/index.htm>

Configure Services	Configure Ports	Configure NetWare	Configure TCP/IP
Configure LAT	Configure AppleTalk	Configure NetBEUI	Configure Banyan
Configure DLC	Future	Future	Configure Password

Enabled Protocols: AppleTalk Banyan DLC LAT Network SNMP TPC/IP Win95/Peer

Print Test Page      Reset Server      Factory Defaults      Reload Server

| Home | Help |

407